


**Audi > C4 > 1992 - 1998**  
**Body Exterior, Interior**  
**63 - Bumpers**

**Rear bumper assembly, removing and installing (sedan)**

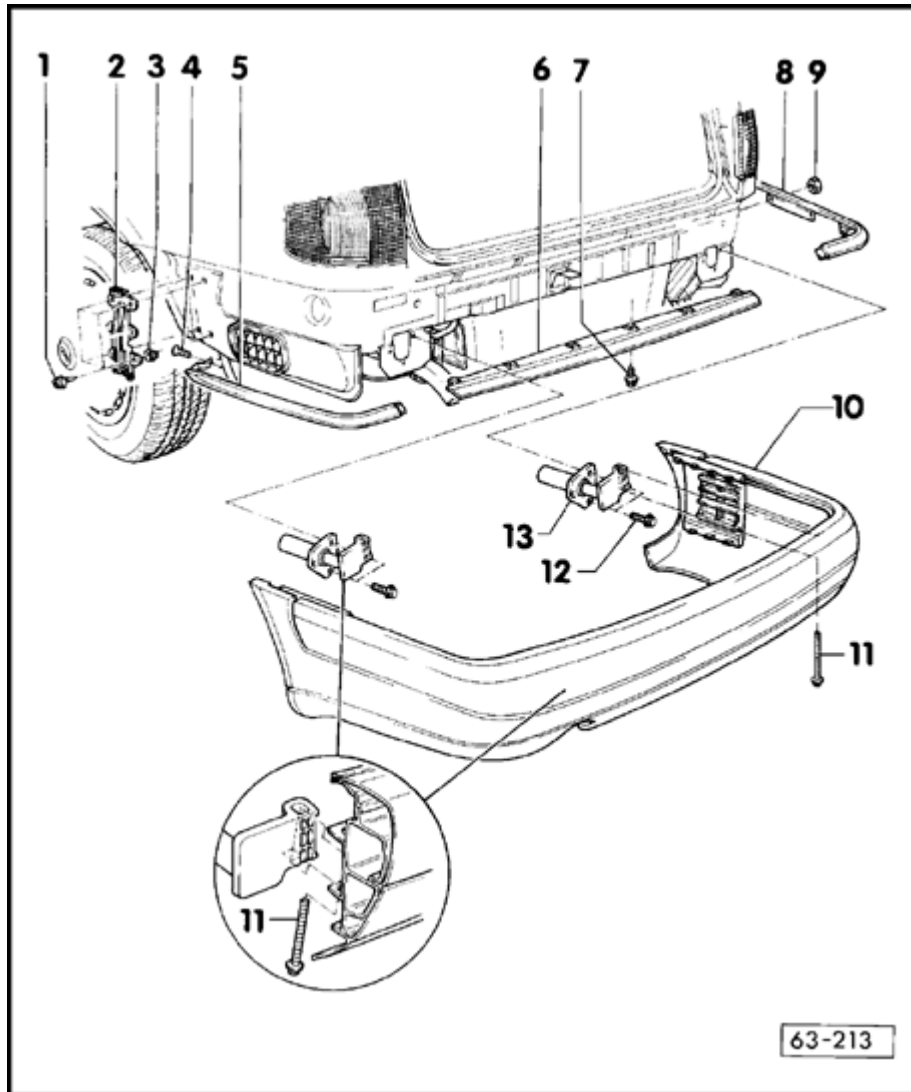

**1 - Screw**

- ◆ 1.5 Nm (13 in lb)

**2 - Guide piece, left/right**

- ◆ Unclip bumper from guide piece
- ◆ Push bumper down at ends and pull out of guide piece

**3 - Expanding nut**

**4 - Bolt w/washer**

- ◆ 25 Nm (18 ft lb)

## 5 - Trim strip, left

- ◆ Removing => Fig. [1](#)

## 6 - Trim strip, center

- ◆ Removing => Fig. [1](#)

Adjusting:


- Remove bumper
- Loosen bolts -7-
- Align strip to left/right side strips -5-, -8-

## 7 - Bolt w/washer

- ◆ 2.5 Nm (22 in lb)

## 8 - Trim strip, right

- Removing => Fig. [1](#)

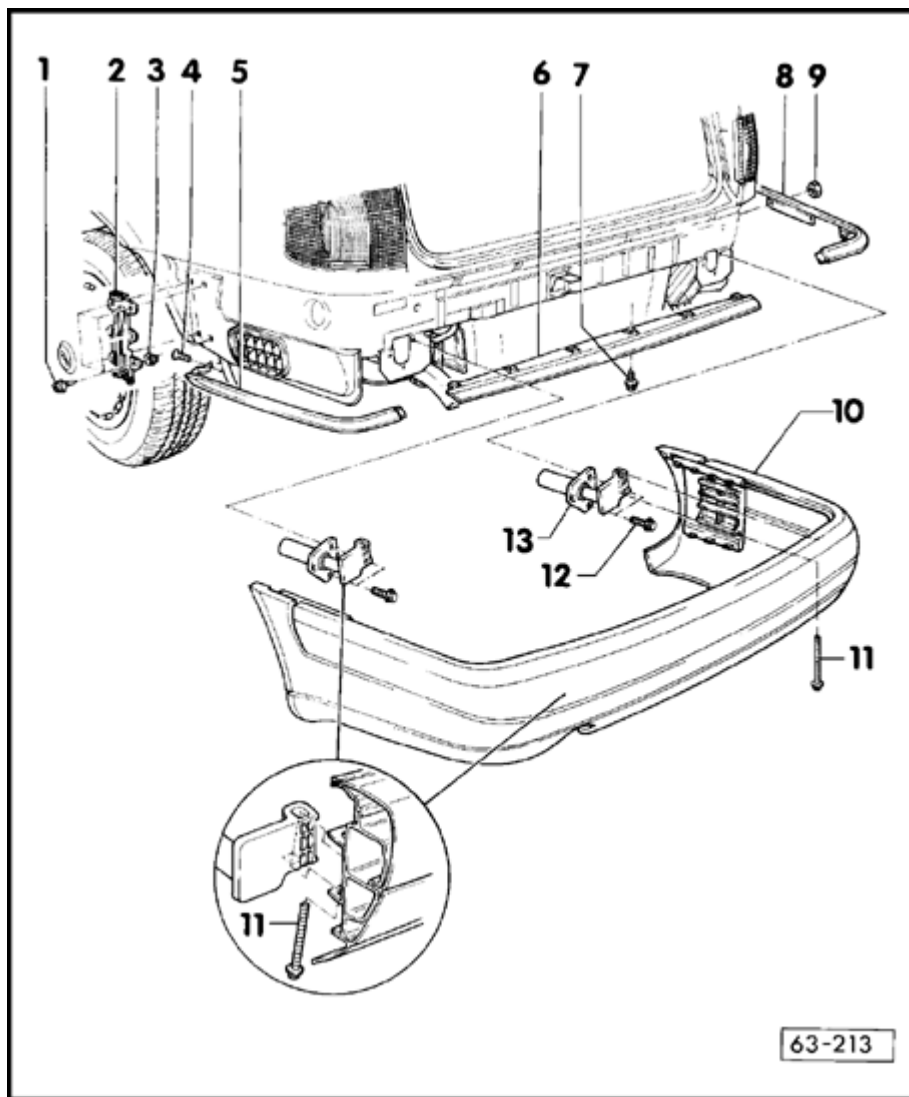

### 9 - Nut

♦ 2.5 Nm (22 in lb)

### 10 - Bumper w/cover

Removing:


- Remove bolts -11-
- Unclip bumper ends from guide piece -2-
- Pull bumper ends downward and out of guides
- Pry bumper ends over wheel opening and remove toward front

Installing:

- Pry bumper ends over edge of wheel opening
- Guide bumper onto impact absorber and into guide piece

**Note:**

*Bumper ends must be pushed as far as possible into wheel opening. They may be adjusted in or out by turning the inside tube of impact absorber. One turn of tube will alter distance 1.0 mm (0.039 in.). After adjustment trim strips must be adjusted to fit bumper.*

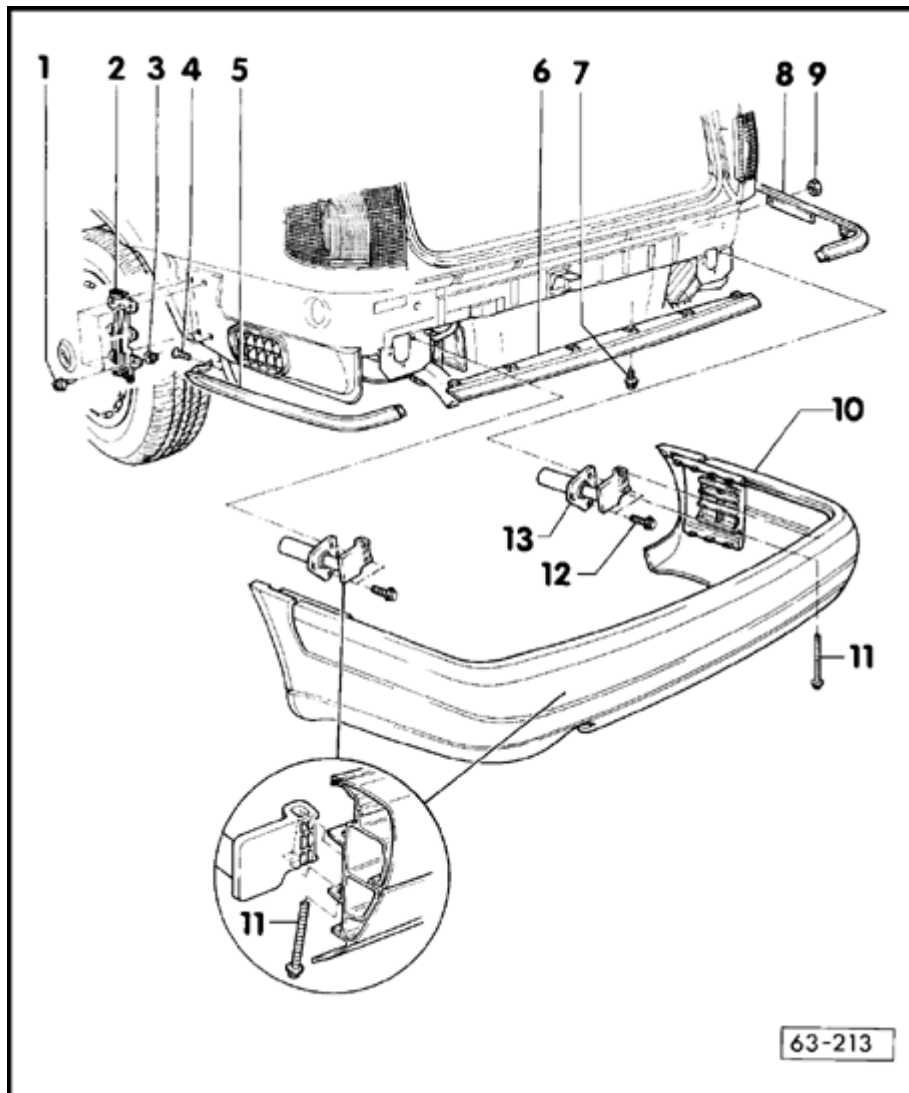

**11 - Bolt w/washer**

♦ 23 Nm (17 ft lb)

**12 - Bolt w/washer**

♦ 23 Nm (17 ft lb)

**13 - Impact absorber**

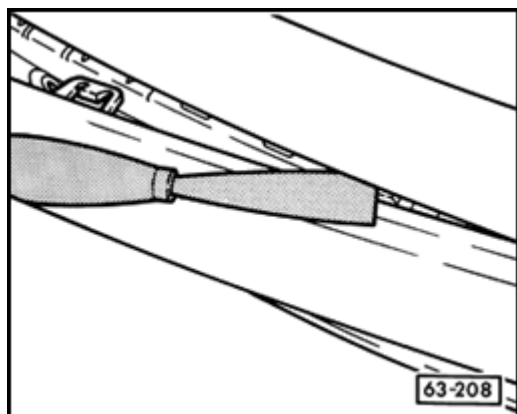


Fig. 1 Removing rear bumper, left, center and right trim

- Remove rear bumper trim while unlocking tabs with plastic putty knife.